

1103P Series Pressure Switch

Miniature Pressure Switch

Nega-Rate®Belleville disc spring/diaphragm pressure sensing mechanism. Small size and stainless steel construction is designed for the most hostile vibration, shock and temperature environments.



- Vented gauge switch
- Welded stainless steel construction

General Specifications

- Set point range from 5 to 105 psig
- Deadband range from 3.5 psi or 15%, whichever is greater, to 45% of the set point
- Proof pressure up to 750 psig
- Pressure capsule all stainless steel, heliarc welded and leak proof to 1×10^{-9} SCC/SEC
- SPDT snap action switch element
- Temperature Range:
 - Ambient -65°F to +275°F (-54°C to +135°C)
 - Media -65°F to +400°F (-54°C to +204°C)
- Vibration capability to 15G's

Optional Features

- Set point from 1 to 1000 psig
- Proof pressure up to 4500 psig
- Dry circuit to 7 amps 28 VDC electrical rating
- DPDT snap action switch element for patented Shunt-Disc®
- Electrical assembly hermetically sealed
- Pressure connector per most military specifications or wire lead
- Operating ambient temperature up to 400°F (204°C)
- Vibration capabilities up to 40G's with a switch element, or 100G's (high frequency) with a patented Shunt-Disc®
- Flameproof capability
- Manual reset indicator
- Check-out feature

Heritage

The Series 1103P is the backbone of the Neo-Dyn switches. It has a long history of usage in both commercial, space and military applications.




ITT


ITT Aerospace Controls | 28150 Industry Drive | Valencia, CA 91355, USA
Phone: 661-295-4000 | Fax: 661-294-1750
Email: sales.aerospace@itt.com | Web: www.ittaerospace.com

1103P Series Pressure Switch

Envelope Dimensions

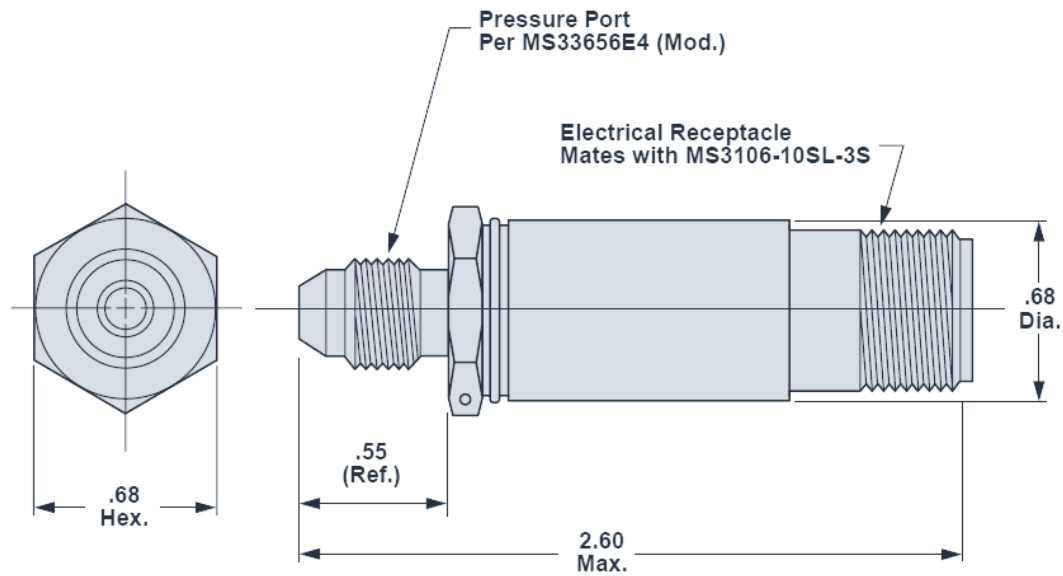

Basic Principles of Design

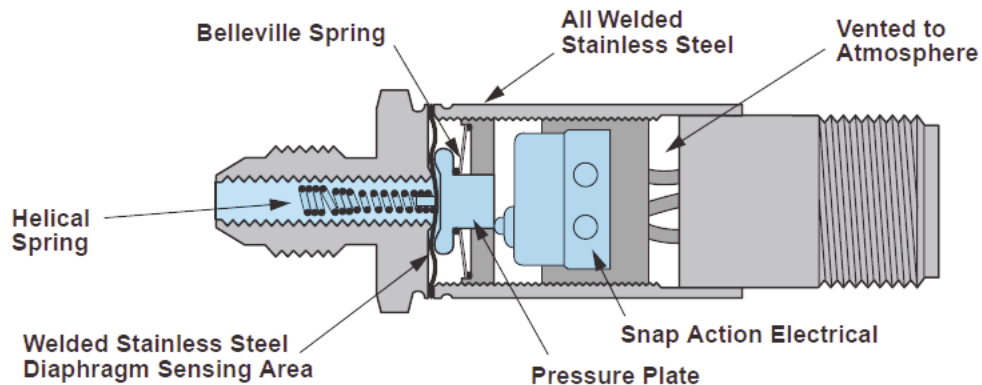

ITT

ITT Aerospace Controls | 28150 Industry Drive | Valencia, CA 91355, USA
Phone: 661-295-4000 | Fax: 661-294-1750
Email: sales.aerospace@itt.com | Web: www.ittaerospace.com

AER0932-1103 04/24

Specifications and dimensions subject to change.