

1173T Temperature Switch

Miniature Temperature Switch

Nega-Rate® Belleville disc spring/diaphragm sensing mechanism combined with a saturated vapor probe thermal system ensures quick response and repeatable set points.

- Hermetically sealed temperature switch
- Welded stainless steel construction



General Specifications

- Set point range from:
 - 40°F to +550°F
 - (-40°C to +288°C)
- Calibration tolerance $\pm 10^\circ\text{F}$
- Deadband range from 7°F minimum
- Probe proof temperature up to 100°F above set point or 600°F maximum
- Probe proof pressure up to 1500 psig
- SPDT snap action switch element
- Electrical chamber hermetically sealed per MIL-HDBK-5400 Para. 3.8
- Temperature Range:
 - Ambient -65°F to +275°F
 - (-54°C to +135°C)
- Vibration capability to 15G's
- Time constant less than 10 seconds

Optional Features

- Dry circuit to 7 amps 28 VDC electrical rating
- DPDT snap action switch element or patented Shunt-Disc®
- Electrical connector per most military specifications or wire leads
- Pressure connection per most military specifications
- Probe proof pressure to 4500 psig
- Operating (ambient) temperature up to 400°F (204°C)
- Vibration capabilities up to 25G's with a switch element, or 100G's (high frequency) with a patented Shunt-Disc®
- QPL Listing per MIL-DTL-28827
- Flame-proof capability
- Manual reset indicator

Heritage

The Series 1173T is used in numerous applications including commercial and military aircraft (fixed wing and rotary), military missiles and tanks.




ITT


ITT Aerospace Controls | 28150 Industry Drive | Valencia, CA 91355, USA
Phone: 661-295-4000 | Fax: 661-294-1750
Email: sales.aerospace@itt.com | Web: www.ittaerospace.com

1173T Temperature Switch

Envelope Dimensions

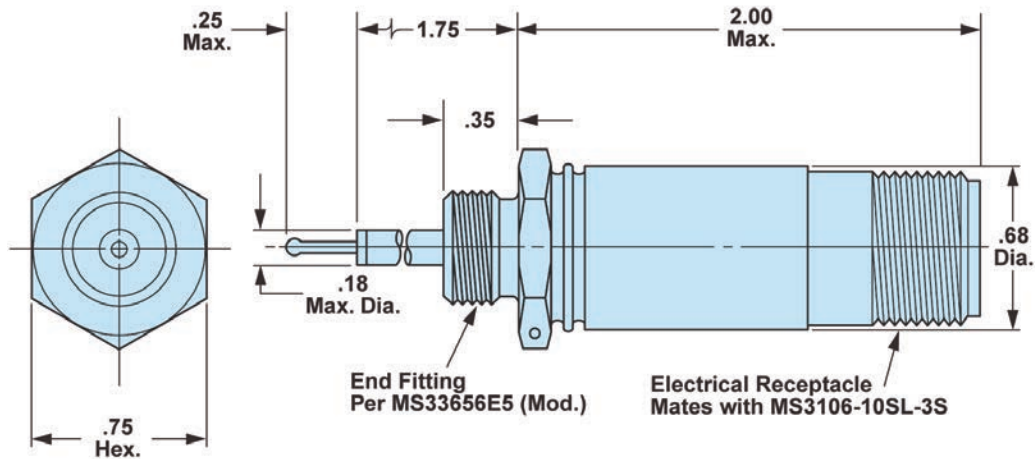

Basic Principles of Design

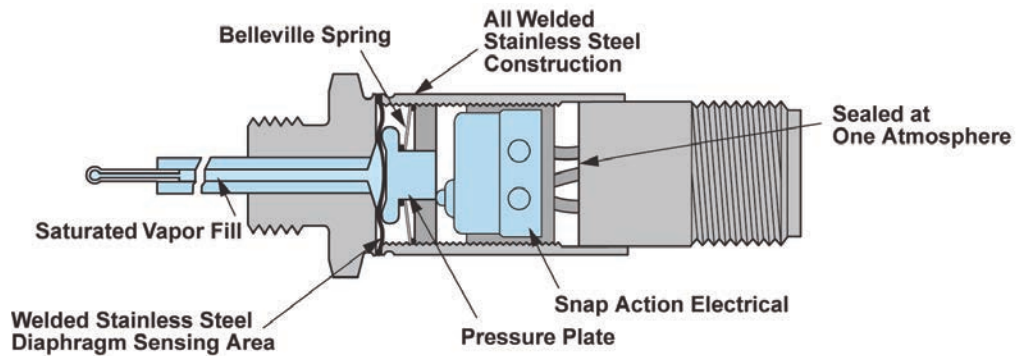

ITT

ITT Aerospace Controls | 28150 Industry Drive | Valencia, CA 91355, USA
Phone: 661-295-4000 | Fax: 661-294-1750
Email: sales.aerospace@itt.com | Web: www.ittaerospace.com

AER0932-1173 04/24

Specifications and dimensions subject to change.